


# Magnum®



# Magnum®





Logix™




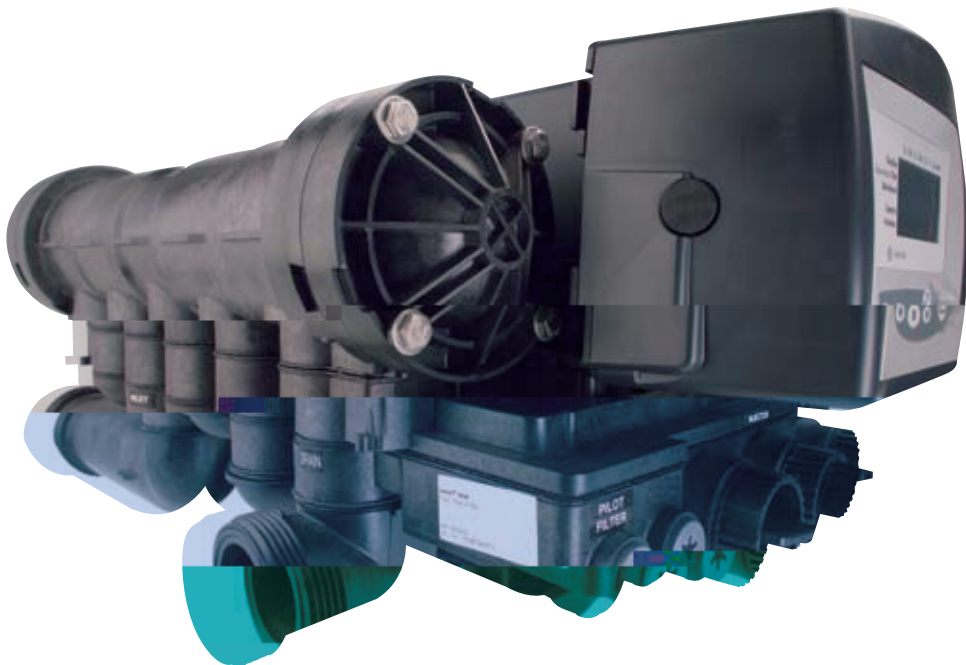



Flow Rates (Valve Only)

|                     |                                       |
|---------------------|---------------------------------------|
| @15 psi (1.03 bar)  | 76 gpm (17.3 m³/hr)                   |
| @ 25 psi (1.72 bar) | 89 gpm (20.2 m³/hr)                   |
|                     | Cv = 19.5 (Kv = 17)                   |
|                     | Cv = 17.8 (Kv = 19.9)                 |
| <hr/>               |                                       |
| /                   | 4 8UN                                 |
| /                   | 2 NPT BSPT CPVC                       |
| *                   | 3/4 NPT                               |
|                     | 1-1/2 NPT BSPT CPVC                   |
|                     | 1-1/2                                 |
|                     | 5/8 ±1/8-                             |
| *                   | 5 - 40 gpm                            |
| <hr/>               |                                       |
| /                   |                                       |
| O                   | EPDM                                  |
|                     | 7 14 16 18 21 24 30 36                |
|                     | 25 psi – 100 psi (1.72 bar – 6.9 bar) |
|                     | 35° – 100°F (2° – 38°C) 120°F (49°C)  |
| <hr/>               |                                       |

## - Magnum

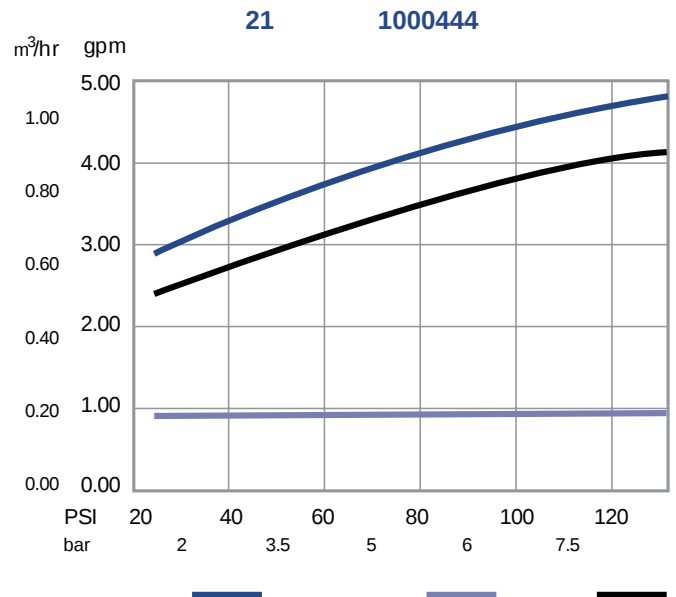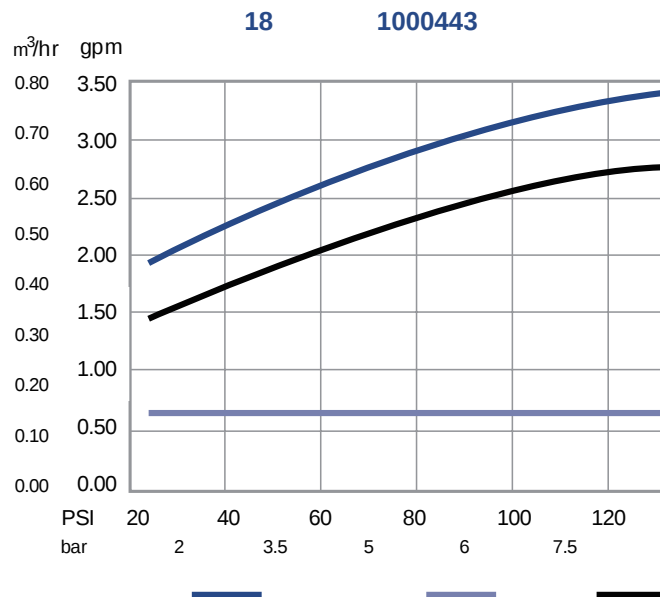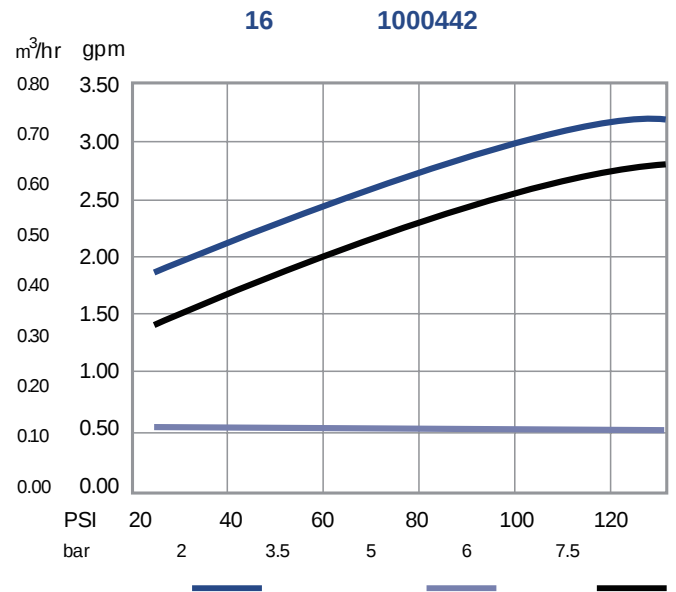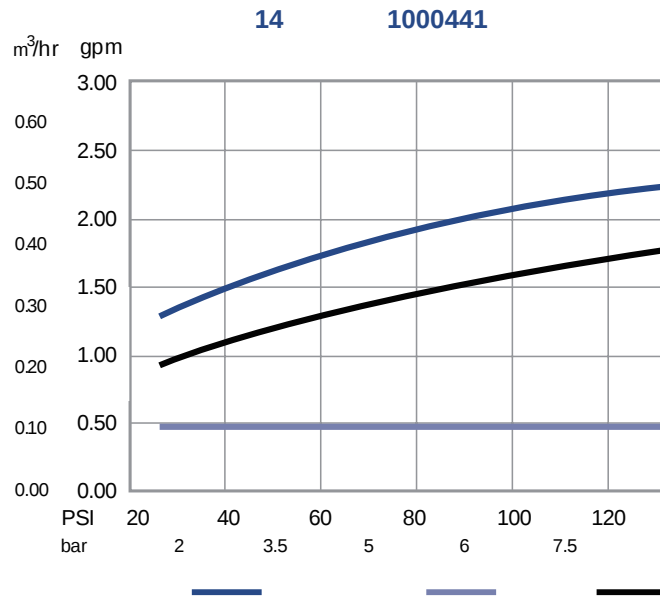

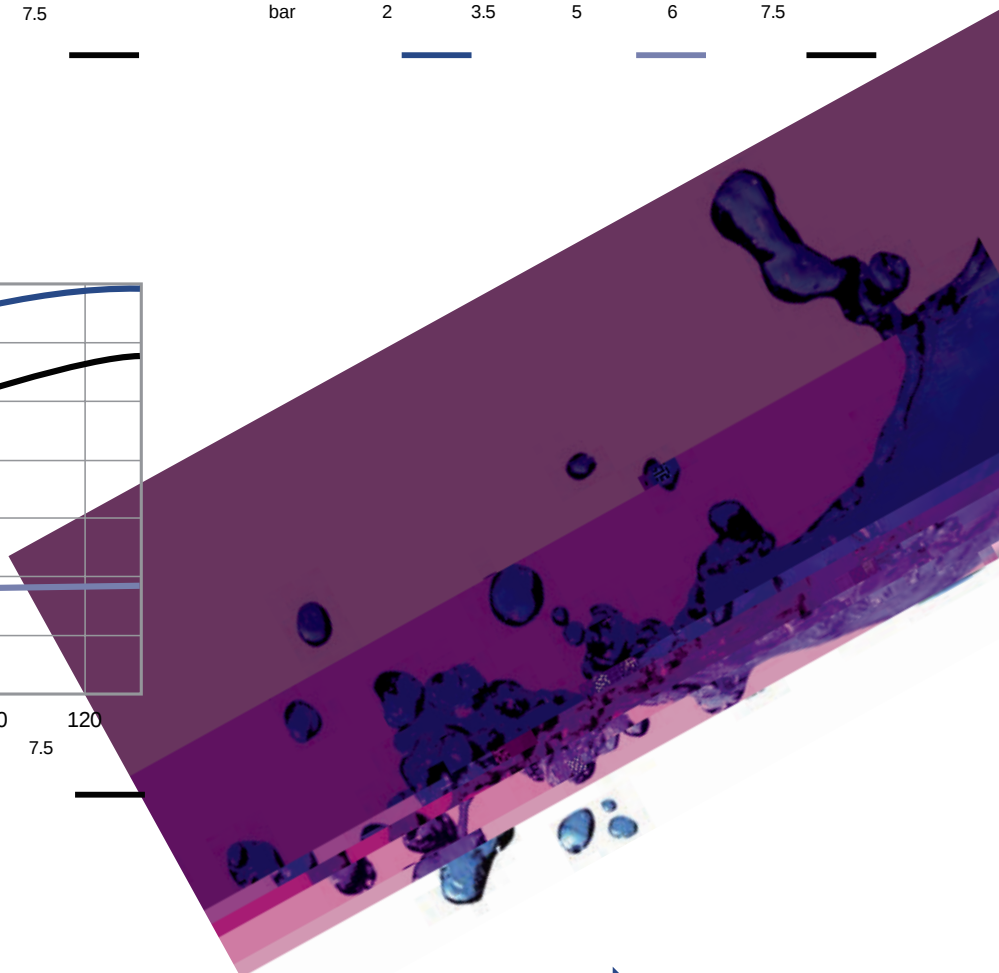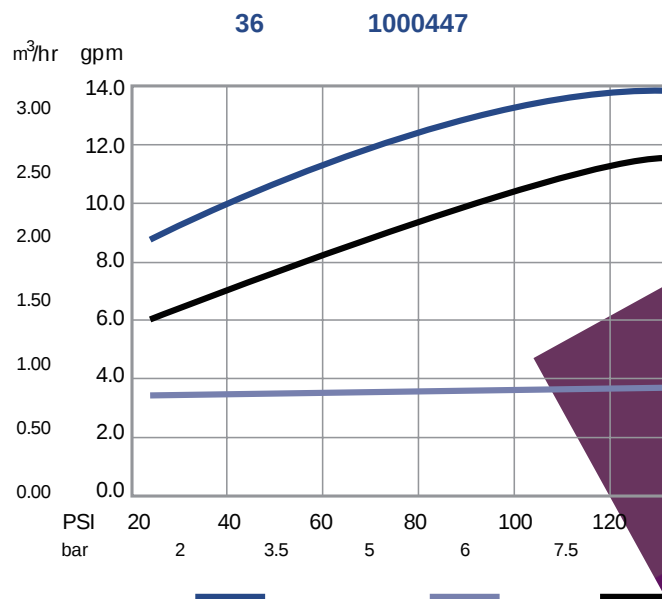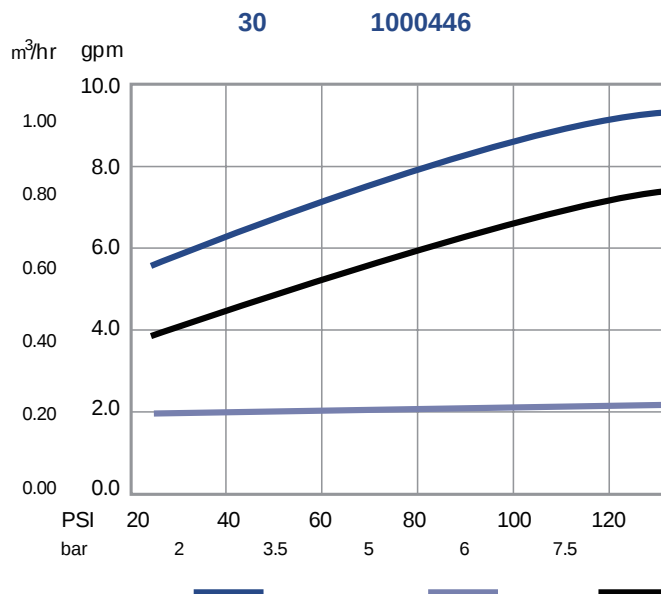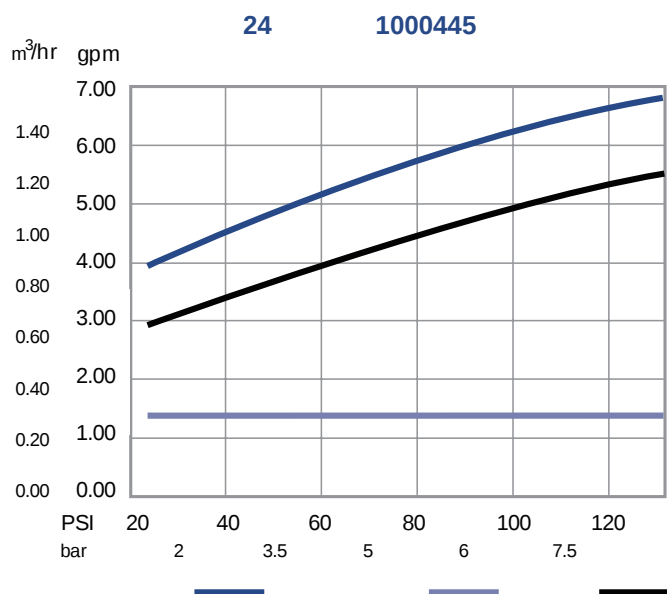

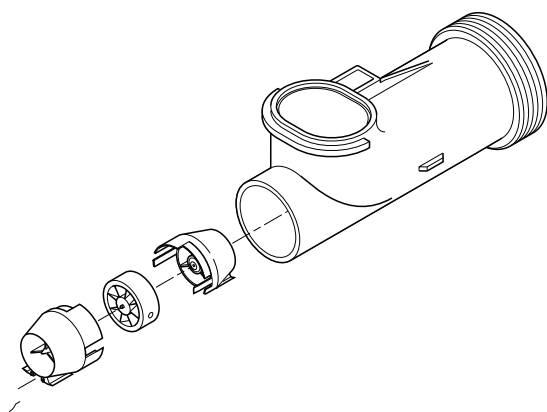

**1-1/2    Magnum CV**

**2    Magnum IT**

